


# GROOVED END FITTINGS

- QUIKCOUP® GROOVED END FITTINGS has been specially designed for flexible installation without need for further preparation in the field. All fittings feature ready made grooves, making for quick easy and flexible alignment.
- QUIKCOUP® fittings are available in a variety of both straight and reducing forms.
- Pressure drop is reduced to minimum due to smooth internal surfaces and maximum inside diameters.
- ★ Max. working pressure for sizes 1 1/4" - 8" 1000 psi (69 bar).

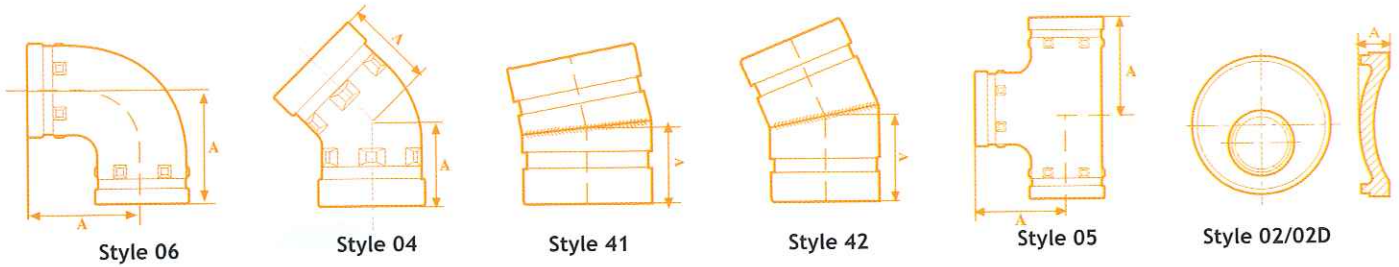

SPECIFICATIONS																				
	NOMINAL SIZE	PIPE OUTSIDE DIAM.	QUICKBENDTM Style 06		QUICKBENDTM Style 04		ELBOW 11 1/4 Style 41		ELBOW 22 1/2 Style 42		TEE Style 05			END-CAP *Style 02 \$02-D						
			A	Weight	A	Weight	A	Weight	A	Weight	A	Weight	A	Weight						
			lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg				
in	1 1/4	1.660	2 3/4	1.0	0.45	1 3/4	0.8	0.38	1.38	0.46	0.21	1.77	0.59	0.270	2 3/4	1.6	0.75	7/8	0.4	0.18
mm	32	42.4	69.9			44.5			35.0			45.0			69.9			22.2		
in	1 1/2	1.900	2 3/4	1.3	0.59	1 3/4	1.0	0.45	1.38	0.55	0.25	1.77	0.73	0.330	2 3/4	2.0	0.89	15/16	0.4	0.20
mm	40	48.3	69.9			44.5			35.0			45.0			69.9			23.8		
in	2	2.375	3 1/4	2.0	0.93	2	1.4	0.64	1.38	0.75	0.34	1.87	1.02	0.460	3 1/4	3.1	1.44	15/16	0.6	0.28
mm	50	60.3	82.6			50.8			35.0			47.6			82.6			23.8		
in	2 1/2	2.875	3 3/4	3.0	1.35	2 1/4	2.0	0.91	-	-	-	-	-	-	3 3/4	4.5	2.00	15/16	0.9	0.39
mm	65	73.0	95.3			57.2			-	-	-	-	-	-	95.3			23.8		
in	3 O.D.	3.000	3 3/4	3.1	1.36	2 1/4	2.2	1.00	1.50	1.32	0.60	2.00	1.76	0.800	3 3/4	5.2	2.38	15/16	1.0	0.45
mm	65	76.1	95.3			57.2			38.0			51.0			95.3			23.8		
in	3	3.500	4 1/4 <<	4.2	1.90	2 1/2	3.3	1.50	1.50	1.74	0.79	2.24	2.65	1.200	3 3/4	6.8	3.09	15/16	1.2	0.55
mm	80	88.9	108.0			63.5			38.0			57.0			108			23.8		
in	4 1/4 O.D.	4.250	5 <<	5.5	2.50	-	-	-	-	-	-	-	-	-	4 1/4	11.1	5.03	1	1.8	0.80
mm	100	108.0	127.0			-	-	-	-	-	-	-	-	-	127			25.4		
in	4	4.500	5	5.7	2.58	3	5.6	2.55	1.77	2.99	1.36	2.64	4.72	2.140	5	11.6	5.27	1	2.1	0.95
mm	100	114.3	127.0			76.2			45.0			67.0			127.0			25.4		
in	5 1/4 O.D.	5.250	5 1/2	9.9	4.50	3 1/4	7.7	3.50	-	-	-	-	-	-	5	13.2	6.00	1	2.9	1.30
mm	125	133.0	139.7			82.6			-	-	-	-	-	-	139.7			25.4		
in	5 1/2 O.D.	5.500	5 1/2	11.2	5.06	3 1/4	8.4	3.80	2.00	4.01	1.82	2.87	5.74	2.605	5 1/2	14.3	6.50	1	3.2	1.45
mm	125	139.7	139.7			82.6			51.0			73.0			139.7			25.4		
in	5	5.563	5 1/2	11.5	5.22	3 1/4	8.4	3.80	-	-	-	-	-	-	5 1/2	14.3	6.50	1	3.3	1.50
mm	125	141.3	139.7			82.6			-	-	-	-	-	-	139.7			25.4		
in	6 1/4 O.D.	6.250	6 1/2 <<	15.8	7.20	3 1/2	11.9	5.40	2.00	5.29	2.40	3.13	8.25	3.740	6 1/2	24.2	11.0	1	4.0	1.80
mm	150	159.0	165.1			88.9			51.0			79.4			165.1			25.4		
in	6 1/2 O.D.	6.500	6 1/2	18.6	8.45	3 1/2	12.3	5.60	2.00	4.78	2.17	3.13	7.45	3.378	6 1/2	26.7	12.13	1	4.6	2.10
mm	150	165.1	165.1			88.9			51.0			79.4			165.1			25.4		
in	6	6.625	6 1/2	19.2	8.72	3 1/2	12.6	5.70	2.00	6.33	2.87	3.13	9.85	4.468	6 1/2	28.4	12.86	1	4.9	2.23
mm	150	168.3	165.1			88.9			51.0			79.4			165.1			25.4		
in	8	8.625	7 3/4	33.2	15.05	4 1/4	24.6	11.20	2.00	9.53	4.32	3.87	18.38	8.335	7 3/4	50.8	23.06	1 3/16	8.7	3.95
mm	200	219.1	196.9			108.0			51.0			98.4			196.9			30.2		
in	10	10.750	9	53.0	26.2	4 3/4	33.0	15.0	-	-	-	-	-	-	9	77.0	35.0	1 1/4	16.5	7.5
mm	250	273.0	229.0			121.0			-	-	-	-	-	-	229.0			32.0		
in	12	12.750	10	77.0	35.0	5 1/4	-	-	-	-	-	-	-	-	10	130.0	59.0	1 1/2	28.6	13.0
mm	300	323.9	254.0			133.0			-	-	-	-	-	-	254.0			32.0		
in	14	14.000	21	124	56.6	8 3/4	82.0	37.3	-	-	-	-	-	-	11 1/2	163	74	1 1/4	39.7	18.0
mm	350	355.6	533.0			222.0			-	-	-	-	-	-	533			@32.0		
in	16	16.000	12	215.0	97.50	10	100	45.4	-	-	-	-	-	-	@12	-	-	1 1/4	48.5	22.0
mm	400	406.4	@305.0			254.0			-	-	-	-	-	-	305.0			@32.0		

NOTE: \*Blank End Cap.  
 § Style 02-D 3" - 8" available with 1/2", 3/4" NPT Drain.  
 76mm-200mm available with 1 1/2" or 2" BSP Drain.

¶ Also available as drain model-06D  
 @Sizes under development